



1. Rotate Front & Rear Hull Spreaders.



2. Insert ends of Hull Spreaders into Tension Rings on the side.

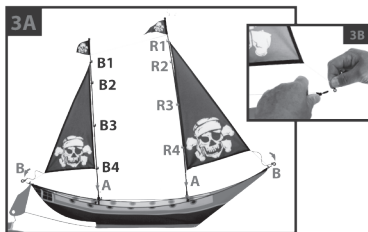


3A. Insert Front and Rear Masts (A) into Posts.

The Front Mast has Red Connectors (R1-R4).

3B. Secure Front & Rear Sails as shown.




4. Attach Front Main Sail (Red Loop) onto Red Connector (R1) & Back Main Sail (Black Loop) onto Black Connector (B1).



5. Clip Top Front Main Sail into R2, Middle Main Sail into R3 & Bottom Main Sail into R4. Clip Top Back Main Sail into B2, Middle Back Sail into B3 & Bottom Back Sail into B4.



6. Secure Rigging Lines (left & right) to Front & Rear Hull Spreaders.



7. Attach the QuikClip® to the Bridle Loop. Top Loop for light to medium winds, Bottom Loop for strong wind.

LAUNCHING - ASSISTED LAUNCH

- The Kite requires a minimum wind of 7 mph/11.3 kph. Let out approximately 75 feet/22.9 m of line and have an assistant hold the kite.
- With your back to the wind, release the kite and take a few steps backwards, the kite will rise into the air. Tug line to gain altitude, let out line to gain distance.
- For storage, reverse assembly steps and place into package. Store your kite in a cool dry place. Excessive heat and/or sunlight can damage the package and kite.

KITE SAFETY

WARNING! Do not fly near overhead power lines.
WARNING! Do not use near overhead power lines or during thunderstorms.
WARNING! Not suitable for children under 3 years due to small parts.
WARNING! Not suitable for children under 3 years due to long cord. Please remove all packaging material before giving the toy to child. Keep important information for future reference.

Never fly near an airport.
 Never fly over people.
 Never fly in thunderstorms.
 Never fly near busy streets.
 Never fly near overhead power lines.
 Never try to retrieve your kite from power lines.
 Call your local power company for assistance.