



ASSEMBLY INSTRUCTIONS

Mustang

Backside of Kite

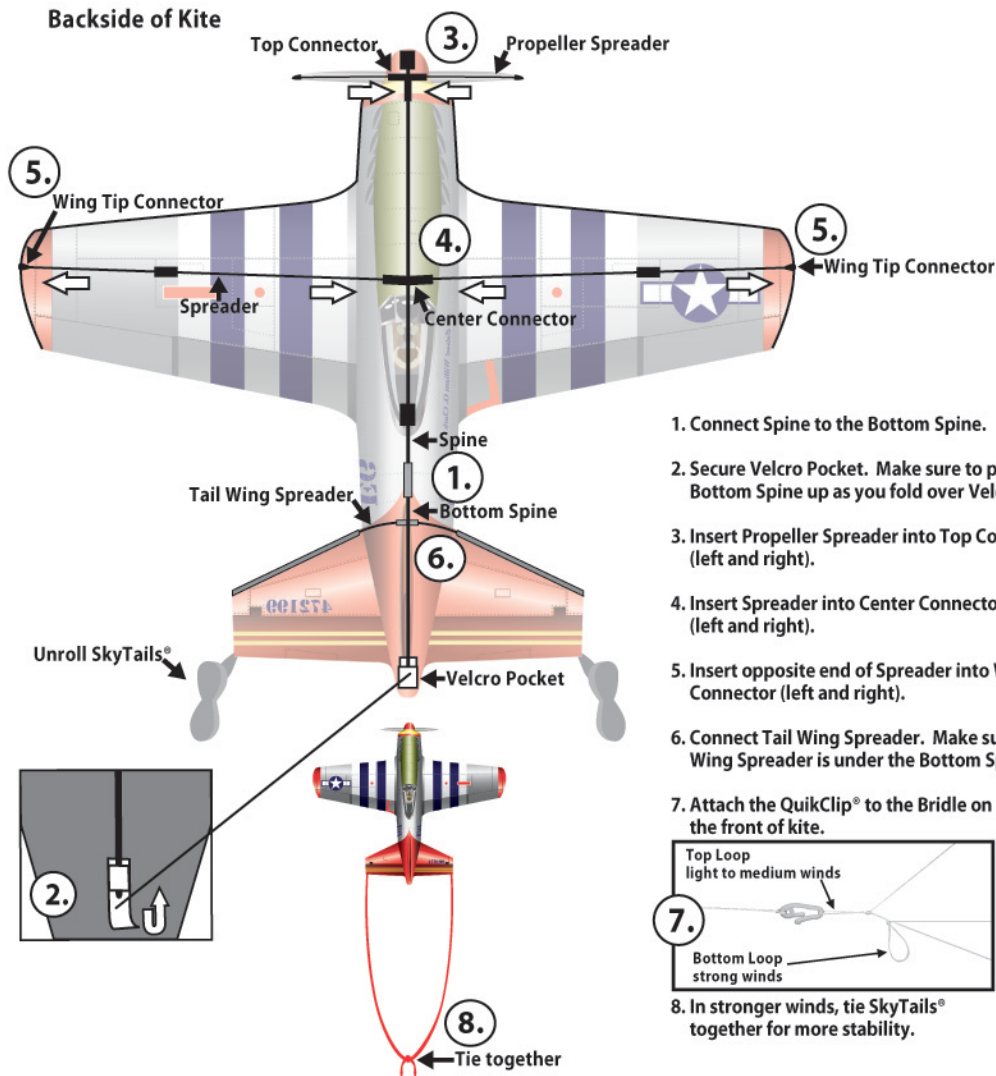

1. Connect Spine to the Bottom Spine.
2. Secure Velcro Pocket. Make sure to push Bottom Spine up as you fold over Velcro Pocket.
3. Insert Propeller Spreader into Top Connector (left and right).
4. Insert Spreader into Center Connector (left and right).
5. Insert opposite end of Spreader into Wing Tip Connector (left and right).
6. Connect Tail Wing Spreader. Make sure Tail Wing Spreader is under the Bottom Spine.
7. Attach the QuikClip® to the Bridle on the front of kite.



8. In stronger winds, tie SkyTails® together for more stability.

LAUNCHING ASSISTANCE

- The kite requires a minimum wind of 8 mph / 11.3 kph. Let out approximately 75 feet / 22.9 m of line and have an assistant hold the kite.
- With your back to the wind, release the kite and take a few steps backwards, the kite will rise into the air. Tug line to gain altitude, let out line to gain distance.
- For storage, reverse assembly steps and place into package. Store your kite in a cool dry place. Excessive heat and/or sunlight can damage the package and kite.

KITE SAFETY

WARNING! Do not fly near overhead power lines.

WARNING! Do not use near overhead power lines or during thunderstorms.

WARNING! Not suitable for children under 3 years due to small parts.

WARNING! Not suitable for children under 3 years due to long cord.

Please remove all packaging material before giving the toy to child.

Keep important information for future reference.

Never fly near an airport.

Never fly over people.

Never fly in thunderstorms.

Never fly near busy streets.

Never fly near overhead power lines.

Never try to retrieve your kite from power lines.

Call your local power company for assistance.