



Top of Kite

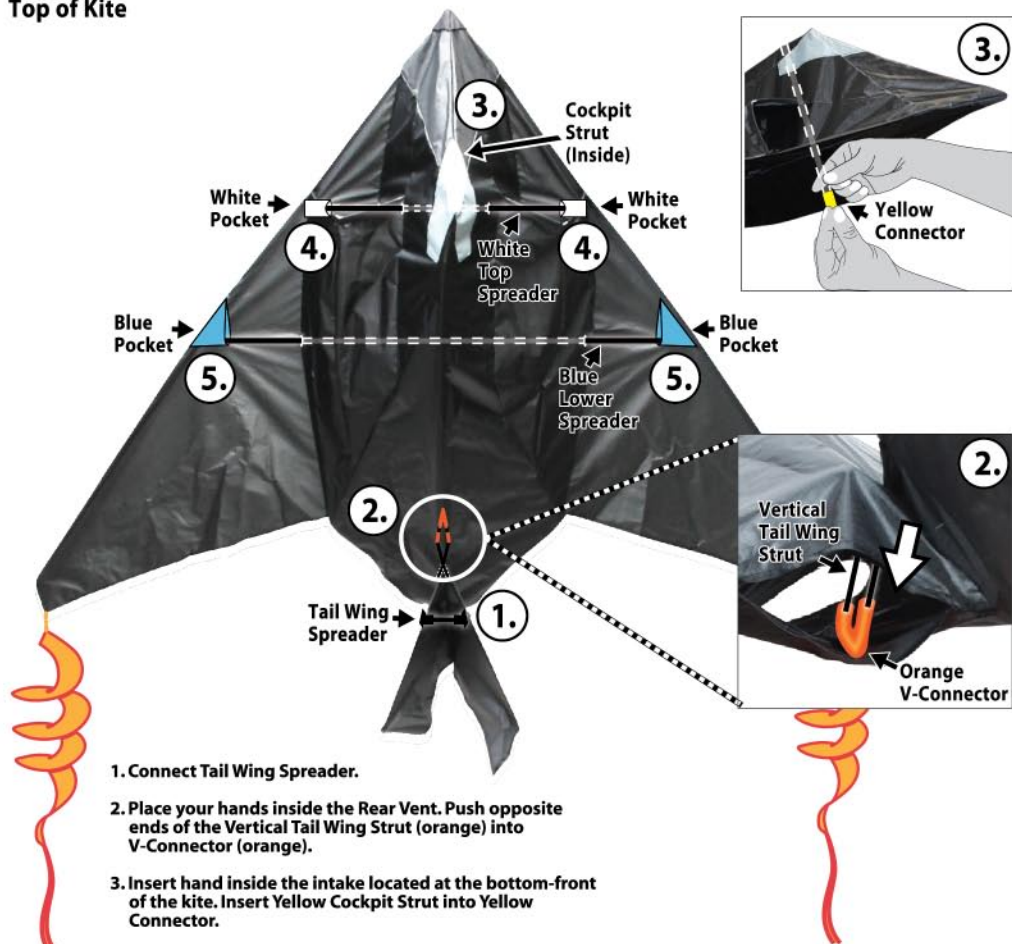

1. Connect Tail Wing Spreader.
2. Place your hands inside the Rear Vent. Push opposite ends of the Vertical Tail Wing Strut (orange) into V-Connector (orange).
3. Insert hand inside the intake located at the bottom-front of the kite. Insert Yellow Cockpit Strut into Yellow Connector.
4. Insert White Top Spreader through the body and into the Top White Pocket. Repeat for opposite end.
5. Insert Blue Lower Spreader through the body and into the Bottom Blue Pocket. Repeat for opposite end.
6. Attach QuikClip® to the Bridle Loop (Front of the Kite).
Top Loop: For Light to Medium Wind Condition.
Bottom Loop: Strong Wind Condition.



LAUNCHING - ASSISTED LAUNCH

- The kite requires a minimum wind of 8 mph / 11.3 kph. Let out approximately 75 feet / 22.9 m of line and have an assistant hold the kite.
- With your back to the wind, release the kite and take a few steps backwards, the kite will rise into the air. Tug line to gain altitude, let out line to gain distance.
- For storage, reverse assembly steps and place into package. Store your kite in a cool dry place. Excessive heat and/or sunlight can damage the package and kite.

KITE SAFETY

WARNING! Do not fly near overhead power lines.
WARNING! Do not use near overhead power lines or during thunderstorms.
WARNING! Not suitable for children under 3 years due to small parts.
WARNING! Not suitable for children under 3 years due to long cord.
 Please remove all packaging material before giving the toy to child.
 Keep important information for future reference.

Never fly near an airport.
 Never fly over people.
 Never fly in thunderstorms.
 Never fly near busy streets.
 Never fly near overhead power lines.

Never try to retrieve your kite from power lines.
 Call your local power company for assistance.